## Corrediça Telescópica Porta Escamoteável


## Componente


| Item | Componente        | Quant. |
|------|-------------------|--------|
| 1    | Corrediça         | 02     |
| 2    | Roldana           | 02     |
| 3    | Parafuso M5x15.5  | 02     |
| 4    | Bucha M5x10       | 02     |
| 5    | Parafuso M4x7     | 08     |
| 6    | Parafuso AACC4x16 | 16     |

| Código         | Α     | В     | С     | D       | E          | CR    |
|----------------|-------|-------|-------|---------|------------|-------|
| B5205ZN        | 179.2 | 258.1 | 403.4 | 28.8    | 413.4 + EP | 283.4 |
| B5305ZN        | 230   | 308.9 | 454.2 | 28.1    | 464.2 +EP  | 334.2 |
| B5405ZN        | 280.8 | 359.7 | 505   | 28.8    | 515 + EP   | 385   |
| B5505ZN        | 331.6 | 410.5 | 555.8 | 29.7    | 565 + EP   | 435.8 |
| Espessura da P |       |       | má    | x.20mm  |            |       |
| Capacidade de  |       |       |       | 13.5Kg  |            |       |
| Acabamento     |       |       |       | Zincado |            |       |

E = Profundidade Interna do Móvel EP = Espessura da Porta CR = Curso de Recuo






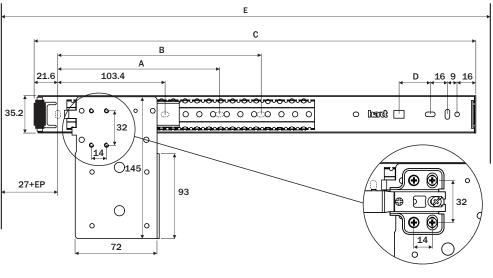

Use preferencialmente Dobradiças HARDT Corpo Alto Calço 02 ou 04 furos

\*Não acompanham o produto



| F | mín. 30mm        |
|---|------------------|
| L | LIM - 6.6(÷2)*   |
| Χ | AIM - (2xF) - 78 |
| Т | AIM - (2xF) - 90 |
| Е | C + 10 + EP      |

AIM = Altura Interna do Móvel LIM = Largura Interna do Móvel EP = Espessura da Porta \* Para móvel c/02 portas

